

TLA-000200G30C




■ 频率范围	0.05GHz - 20GHz
■ 增益	30dB typ
■ P1dB	15dBm typ
■ 噪声系数	2.0dB @10GHz

技术指标@25°C

频率范围	0.05GHz - 20GHz
增益	30dB typ
增益平坦度	±2.0dB @1-20GHz
P1dB	15dBm typ
噪声系数	2.0dB @10GHz
输入驻波	2.0 : 1 typ
输出驻波	1.8 : 1 typ
电压	12V
电流	210mA
工作温度	-40° C ~ 70° C
储存温度	-55° C ~ 100° C
极限电压	13V
最大入口功率	-10dBm

外形尺寸

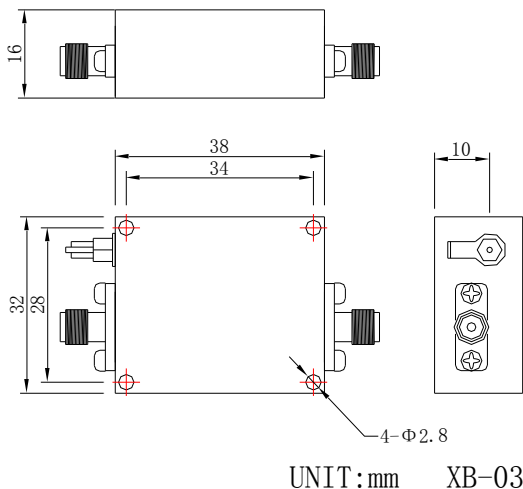

订单描述

TLA-000200G30C  指标特性

测试曲线 (Temp @+25°C)

