


## TPA-020080G01



### 外形尺寸

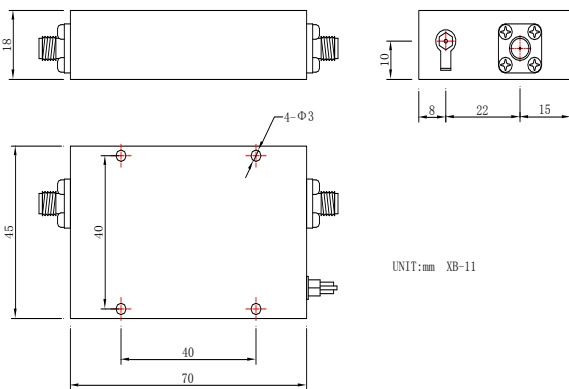

### 测试曲线 (Temp @+25°C)

■ 频率范围	2.0-8.0GHz
■ 增益	35.0dB
■ P1dB	30.0dBm

### 技术指标@25°C

频率范围	2.0-8.0GHz
增益	35.0dB
增益平坦度	±2.5dB typ
P1dB	30.0dBm
OIP3	40.0dBm
输入驻波	2.0 :1
输出驻波	2.0 :1
电压	24.0V
电流	1.0A
工作温度	-20°C ~70°C
储存温度	-55°C ~ 100°C
极限电压	28V
最大入口功率	+3dBm

### 订单描述

TPA-020080G01



指标特性

