





TLA-000050M20

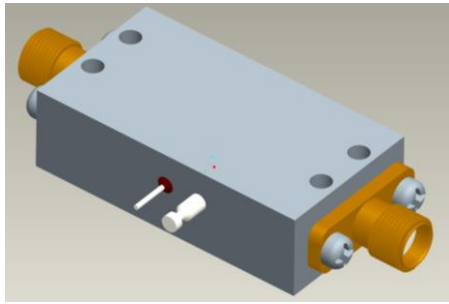

外形尺寸

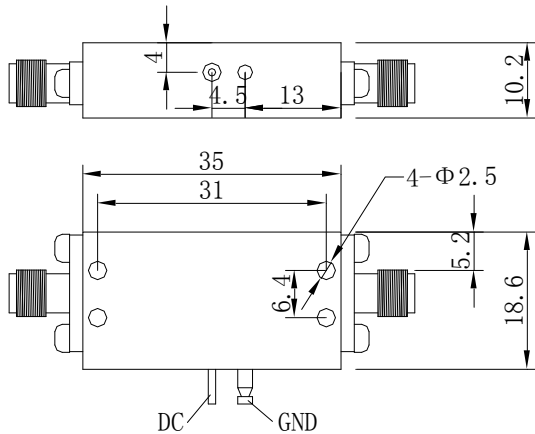

测试曲线 (Temp @+25°C)

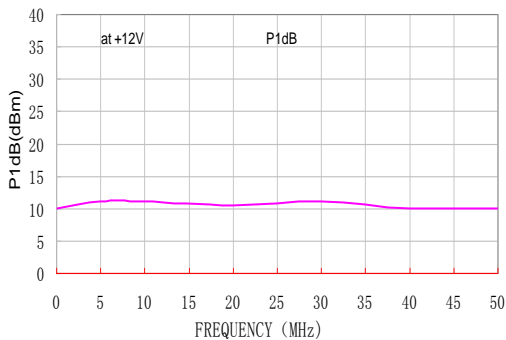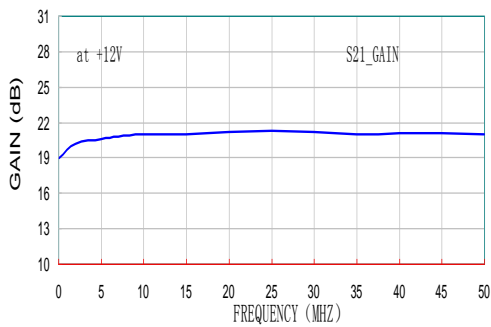

■ 频率范围	100KHz ~ 50MHz
■ 增益	20dB typ
■ P1dB	10dBm typ
■ 噪声系数	3.0dB@10MHz typ

技术指标@25°C

频率范围	100KHz~ 50MHz
增益	20dB typ
增益平坦度	±1.5dB typ
P1dB	10.0 dBm typ
OIP3	20dBm typ
反向隔离	50dB
噪声系数	3.0 dB
输入驻波	1.5 :1
输出驻波	1.5 :1
工作电压	12.0 V
工作电流	200mA
工作温度	-20°C ~ 70°C
储存温度	-55°C ~ 100°C
直流电压	15V
射频入口功率 (最大值)	-10dBm

订单描述

TLA-000050M20



指标特性

