



## TPA-000010G06B



### 典型的应用领域





- 电子电力
- 生物医学电子
- 实验室测试
- 科学实验

### 外形尺寸

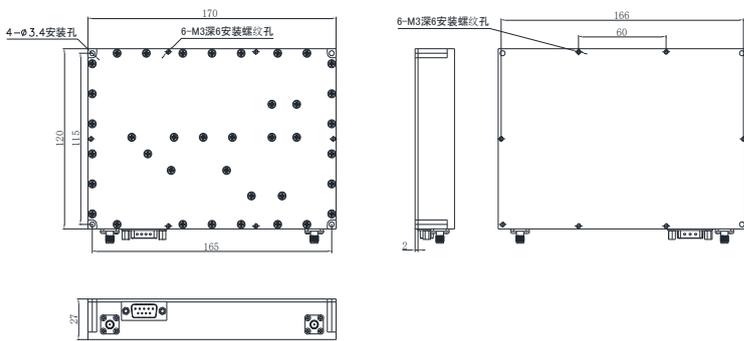

XB-1G UNIT: mm

### 测试曲线 (Temp @+25°C)

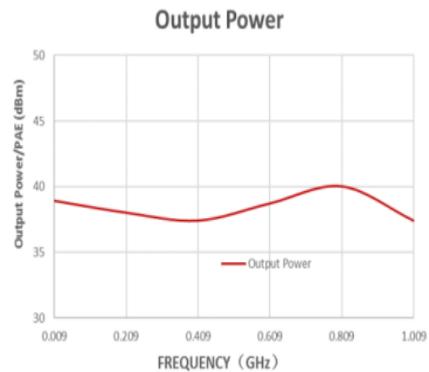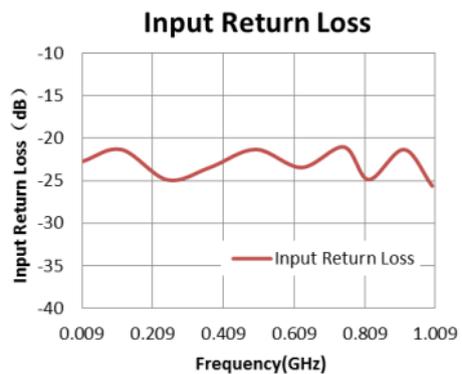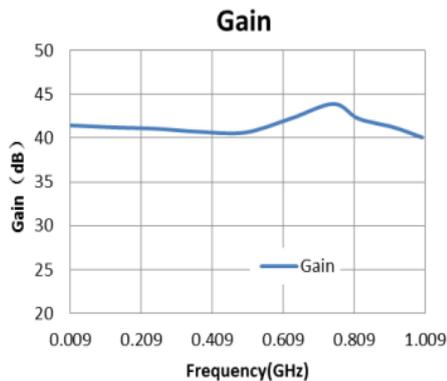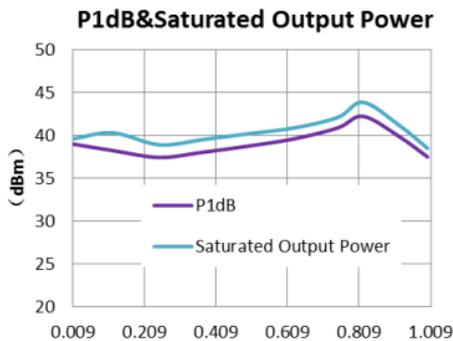

■ 频率范围	0.009~1.0GHz
■ 增益	40.0dB typ
■ P1dB	38.0dBm typ
■ 峰值检波输出动态范围	40.0dB typ

### 技术指标@25°C

频率范围	0.009~1.0GHz
增益	40.0dB typ
增益平坦度	±2.0dB typ
P1dB	38.0dBm
OIP3	42.0dBm
输入驻波比	1.5:1
输出驻波比	1.5:1
电压	28.0V
电流	1.5A
工作温度	-20°C~+70°C
储存温度	-55°C~+100°C
极限电压	30.0V
最大入口功率	+5dBm
结构尺寸	170mm×120mm×27mm

### 订单描述

TPA-000010G06B 指标特性

